


HGV Wheel Stops

These wheel stops are used extensively in commercial and industrial car parks where you need to control the parking of vehicles to eliminate clash with vehicles parking against perimeter walls, perimeter fencing and or back to back parking.

The best control comes from ensuring the end user adopts a reverse parking policy only.

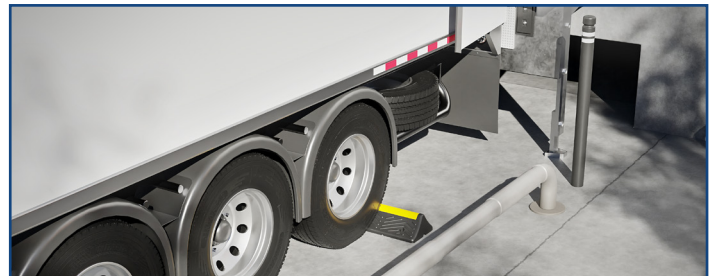

Product Features

Ideal for parking spaces for coaches, buses, lorries, larger vans, as well as for freight warehouses, securing docks in logistics centres

It is installed by means of expansion bolts directly into the surface of the car park

The installation requires no additional preparation of the substrate

Technical Details

1000mm Long, 300mm Wide x 150mm High

Manufactured from recycled truck tyres

For concrete or tarmac installation

Excellent visibility thanks to 3M reflective tape

Product Specification

Material	SBR rubber granulate PUR resin, Reflective tape 3M Metal reinforcement for assembly		
Length	1000mm		
Width	300mm		
Height	150mm		
Weight	24.5 KG		
Colour/finish	Black with Yellow 3M reflective tape		
Tensile strength	≥ 1,0 MPa PN-ISO 37		
Hardness	≥ 55 ShA° PN-EN ISO 868:2005		
Tolerance - length, width	± 2	%	of nominal
Tolerance - height	± 2	%	of nominal
Tolerance- weight	± 2	%	of nominal

