

Brandsafe


Heavy Duty Potted Bollard

Diamond core drill and cast-in **potted bollards** with galvanised steel core. Finished with polymer bollard cover kits for high visibility and no-paint maintenance benefits. Bollards incorporate 50mm reflective silver band. Ideal for external level access loading doors, where HGV trailers reverse in and out of industrial buildings. Available in 5 different colours suited to warehouse regulations.



Features and Benefits

- Potted bollards with polymer covers for superior strength.
- Universal required socket depth of approx 500mm.
- 50mm reflective band for high visibility.
- 5 standard colours, bespoke options available on request.
- Made from steel and polyurethane.
- Available heights - 960mm, 1260mm & 1560mm.
- Finished hot dip galvanised BS EN ISO 1461.
- Rawl R-SPL-10120/40 safety plus anchors M10 x 120mm (3).

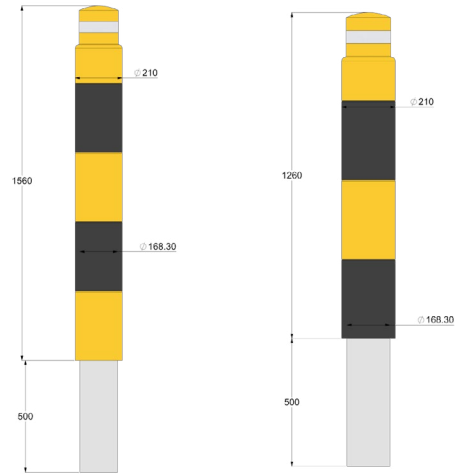

Material	Mild steel / polyethylene
Dimensions	960mm high - 168mm diameter / 210mm diameter overall 1260mm high, 168mm diameter / 210mm diameter overall 1560mm high, 219mm diameter/ 260mm, diameter overall
Socket depth	500mm
Finish	Hot dip galvanised (HDG) - BS EN ISO 1461
Colour options	Green/White (fire escape rooms) Red/White (high warning areas) Black/Yellow (caution areas) Yellow/Black (caution areas) Yellow (caution areas)