

Product Specification Sheet

HLGV Wheel Stops

These wheel stops are used extensively in commercial and industrial car parks where you need to control the parking of vehicles to eliminate clash with vehicles parking against perimeter walls, perimeter fencing and or back to back parking.

The best control comes from ensuring the end user adopts a reverse parking policy only.






Product Features

Suitable for areas with vans and other smaller commercial vehicles in use

Incorporates a design feature that will allow the trailer to be 'pulled back over the wheel stop' in the unlikely event the trailer should override the parking position

Moulded-in hi-vis strip for added pedestrian and driver visibility

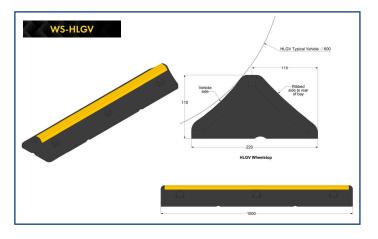

Technical Details

 $1000 mm \ Long, \ 220 mm \ Wide \ x \ 110 mm \ High$

Manufactured in the UK from 95% recycled truck tyres

50mm wide reflective yellow strip, moulded-in for pedestrian and driver visibility

5 no M16 Floor Anchors provided for concrete or tarmac installation

Product Specification

Material	Polyurethane bonded recycled truck tyre, crumbed rubber
Recycling group	Rubber
Length	1000mm
Width	220mm
Height	110mm
Fixing anchors	5 no. M16 Floor Anchors
Colour/finish	Black with Yellow Visibility Stripe