

Product Specification Sheet

Parking Seperators

Parking spacers are used to define parking spots and stop vehicles from causing damage to buildings or pedestrians.


These parking seperators help by optimising the use of parking space in public and private car parks.




Ideal for parking spaces for coaches, buses, lorries, larger vans, as well as for freight warehouses, securing docks in logistics centres

It is installed by means of expansion bolts directly into the surface of the car park

The installation requires no additional preparation of the substrate

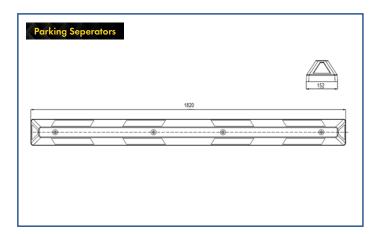





Technical Details

Comes in 1820mm Lengths

Manufactured from recycled truck tyres

For concrete or tarmac installation

Excellent visibility thanks to 3M reflective tape

Product Specification

Material	SBR rubber granulate PUR resin, Reflective tape 3 <i>M</i> Metal reinforcement for assembly
Model Number	180
Length	1820mm
Width	152mm
Height	102mm
Weight	17kg
Colour/finish	Black with 3M reflective tape
Tensile strength	≥ 1,0 MPa PN-ISO 37
Hardness	≥ 55 ShA° PN-EN ISO 868:2005
Tolerance - length, width	±2 % of nominal
Tolerance - height	±2 % of nominal
Tolerance- weight	±2 % of nominal