

Brandsafe


Car Wheel Stops

These **wheel stops** ensure the end user adopts a reverse parking policy only. At 80 mm high (rather than the traditional 100 mm high), you will mitigate the risk of clash with lowered suspension, low bumpers/skirting and or mud flaps of all vehicles.



Features and Benefits

- Parking bay car wheel stops that cater for all domestic vehicles.
- Designed to eradicate bending and splitting associated with hollow rubber wheel stops.
- Moulded-in hi-vis strip for added pedestrian and driver visibility.
- 1000 mm long, 140 mm wide x 80 mm high.
- Manufactured in the UK from 95% recycled truck tyres.
- 50 mm wide reflective yellow strip, moulded-in for pedestrian and driver visibility.
- 3 no. M14 x 135 concrete screws provided for concrete or tarmac installation.

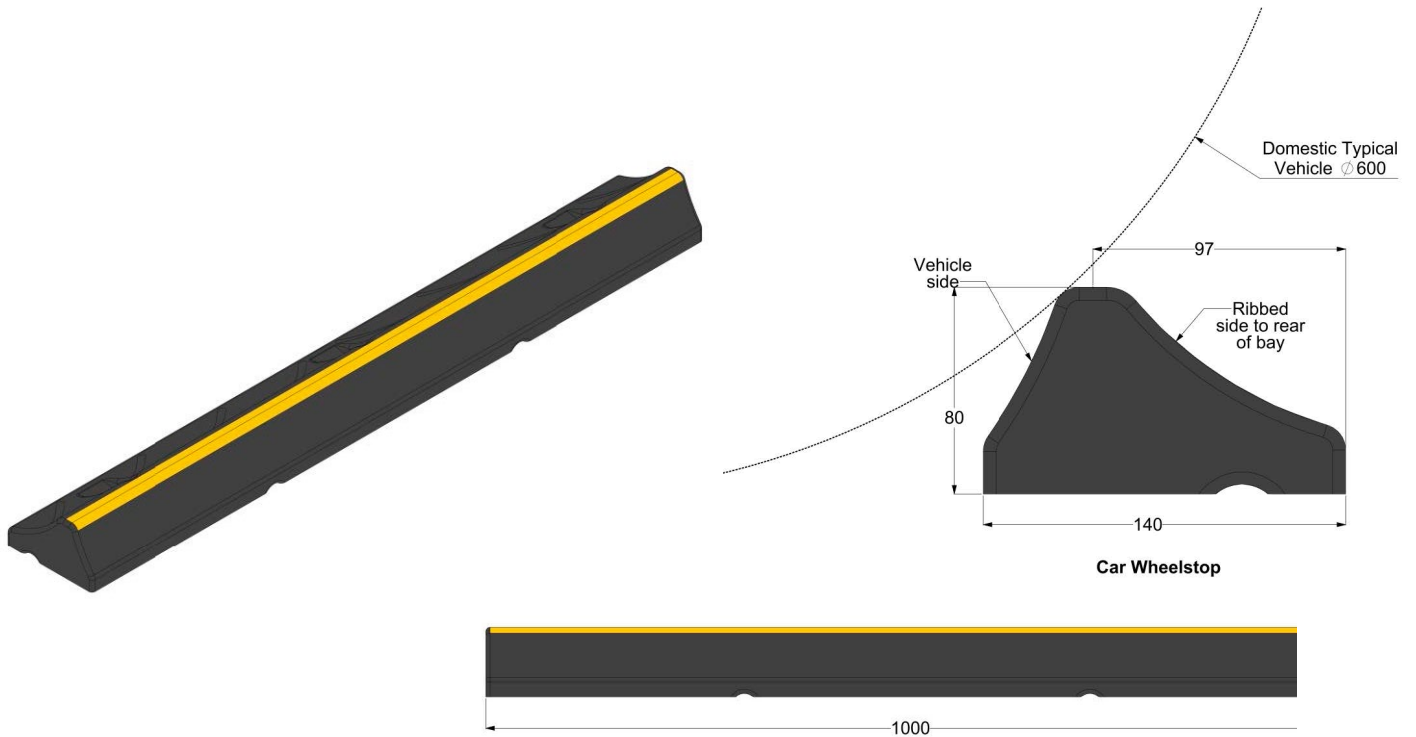

Material	Polyurethane bonded recycled truck tyre, crumbed rubber
Length	1000 mm long
Width	140 mm
Height	80 mm
Fixing anchors	3 no. M14 x 135 concrete screws
Fixture hole diameter	20 mm
Drill diameter	15 mm concrete, 14 mm tarmac
Drill depth	105 mm
Colour options	Black with yellow visibility stripe