


Brandsafe


Wheel Stops Commercial Vehicles

These **wheel stops** ensure the end user adopts a reverse parking policy only. At 130 mm high (rather than the traditional 100 mm high), you will mitigate the risk of clash with the HLGVs rolling over and into the protected area where goods may be stored as well as preventing clashes with underside of trailers.

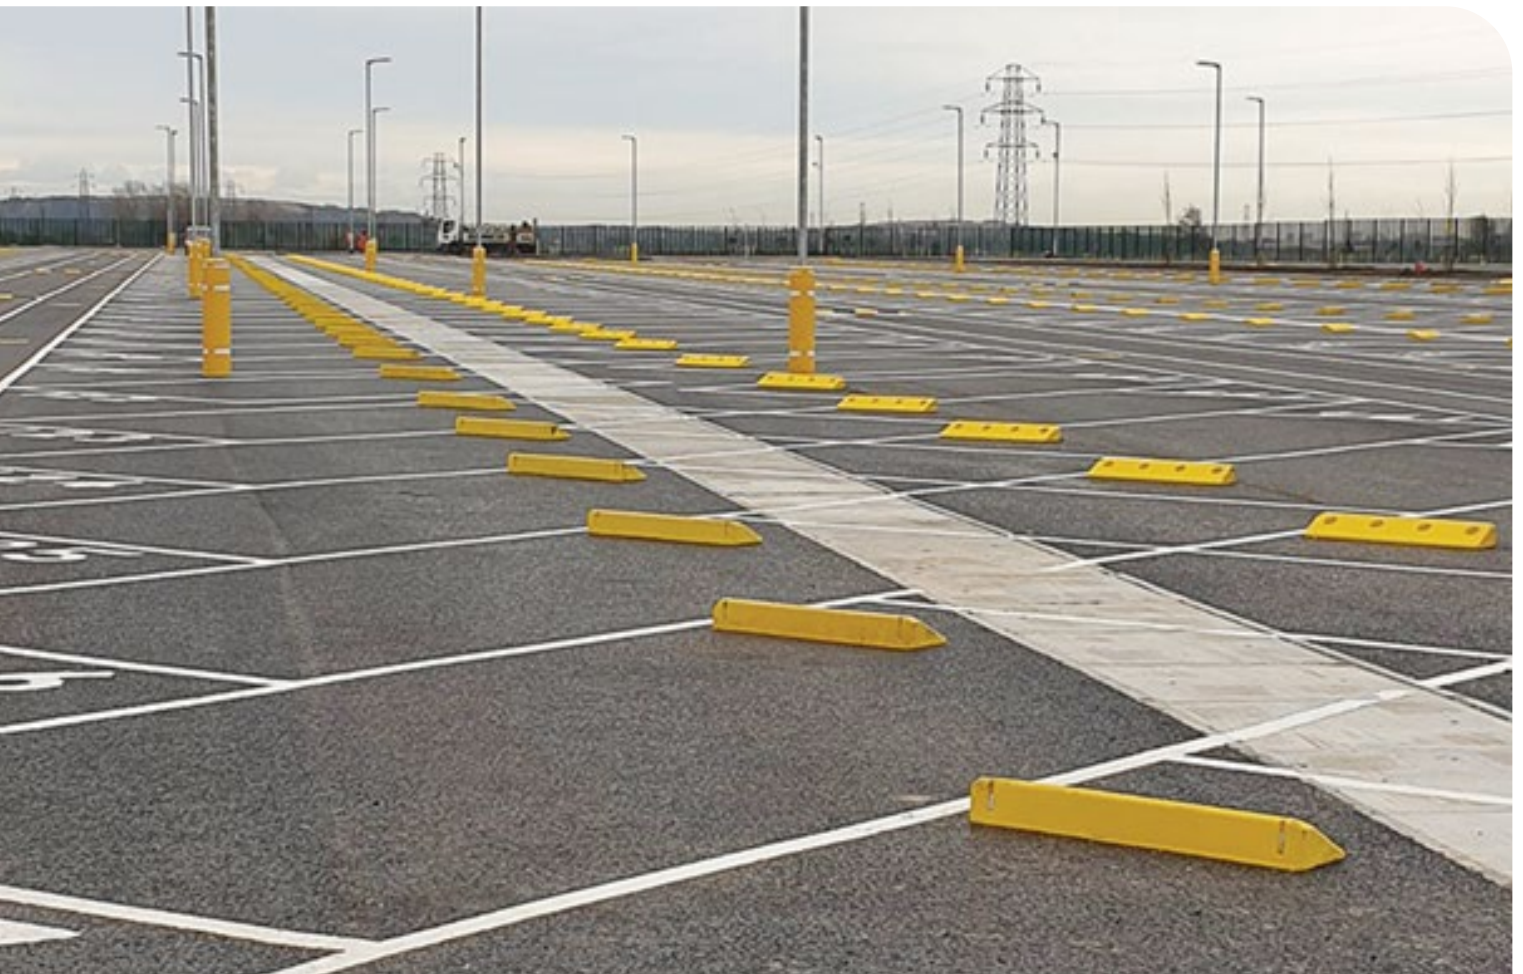

Features and Benefits

- Used in warehouse lorry bays to eliminate clash with vehicles parking against perimeter walls, perimeter fencing and/or up against a bay door.
- Mitigate the risk of clash with HLGVs rolling over and into the protected area.
- Lower the risk of clash with lowered suspension, low bumpers/skirting, mud flaps or undersides of trailers.
- 1000 mm long, 250 mm wide x 130 mm high.
- Manufactured from robust and semi flexible PVC.
- Fixings provided suitable for concrete or tarmac substrates.
- Available in two colours - black or yellow.

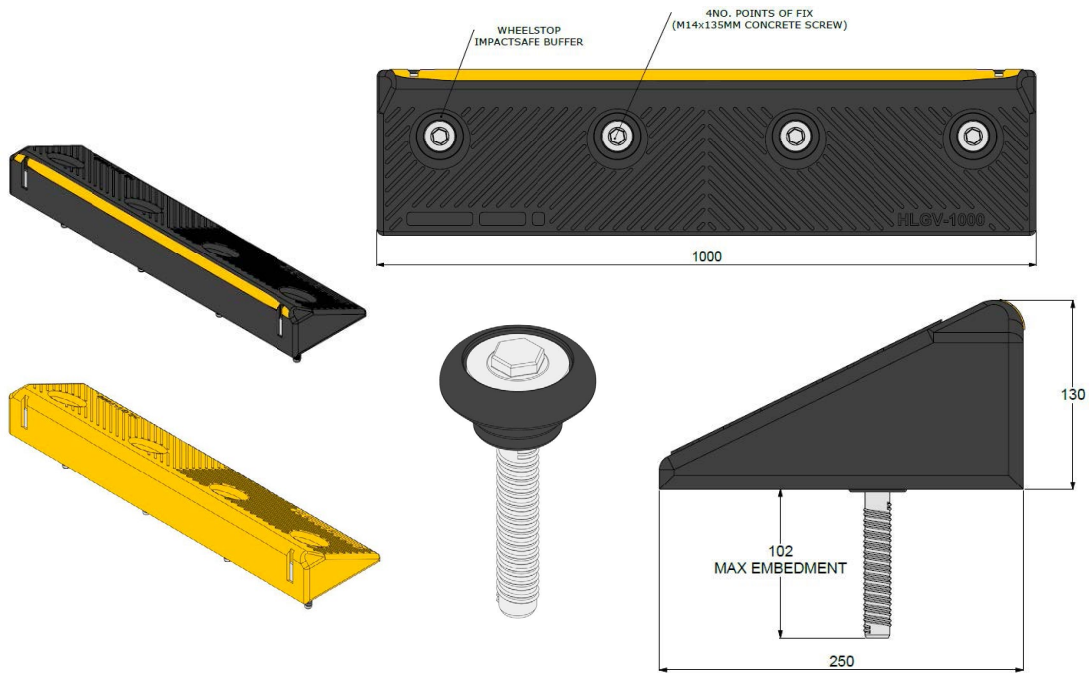

Material	Semi-flexible PVC
Length	1000 mm long
Width	250 mm
Height	130 mm
Fixing anchors	4 No. M14 x 135 mm concrete screws
Fixture hole diameter	18 mm (ImpactSAFE buffer plug)
Drill diameter	14 mm concrete, 13 mm tarmac
Drill depth	105 mm
Colour options	Black with yellow visibility strips Yellow with white visibility strips